MK™ Dispensing Solutions




2-COMPONENT DISPENSERS



INDUSTRY

MK[™] SYSTEM OVERVIEW

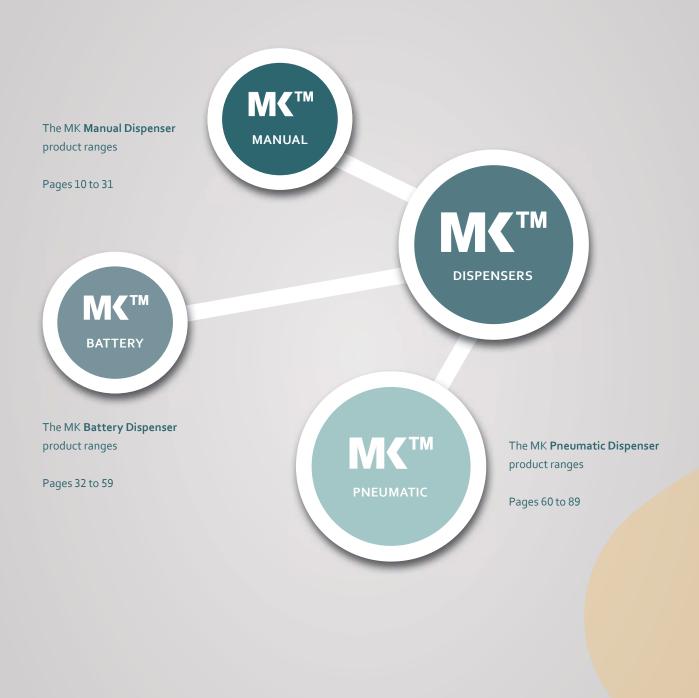

All of our MK[™] dispensers may be recognized by their well-known unique and pleasing visual appearances.



PRODUCT RANGES SMART DISPENSING FOR ALL APPLICATIONS.

Manual Dispen	sers							
P	H8 XM	cartridge	50 mL (1.8 oz)	1:1, 2:1	1.3 kN	12:1	low	10-11
	H236 M H236 M-410	cartridge	200 mL (7 oz)	1:1, 2:1, 4:1, 10:1	5 kN	26:1	low/medium	12-13
	H248 H248 M	cartridge	200 mL (7 oz)	1:1	4 kN	18:1	medium	14–15
	H297 MN	cartridge	330 mL (11.6 oz)	10:1	5 kN	26:1	medium	16–17
	H297 iMN	cartridge	330 mL (11.6 oz)	10:1	5 kN	26:1	medium	18–19
	H285 sM H285 S	cartridge	380 mL (13.4 oz)	10:1 5:1	5 kN	26:1	medium	20-21
	H260 H260 M	cartridge	350 mL (12.3 oz)	10:1	5 kN	26:1	medium	22–23
	H244 s	cartridge	385 mL (13.6 oz)	3:1	5 kN	26:1	high	24–25

Name/ Description	Cartridge/ Sachet/Bulk	Cartridge / Sachet Capacity	Cartridge Ratio	Maximum Thrust	Mechanical Advantage Ratio	Material Viscosity	Pages
H288 H288 M H288 N	cartridge	600 mL (21.1 oz)	1:1	5 kN	26:1	medium	26–27
H293 H293 PM	cartridge	450 mL (15.8 oz) 600 mL (21.1 oz)	2:1 1:1	5 kN	26:1	medium/high	28–29
H239	cartridge	900 mL (31.7 oz)	2:1	5 kN	26:1	high	30-31

PRODUCT RANGES SMART DISPENSING FOR ALL APPLICATIONS.

	Name/ Description	Cartridge/ Sachet/Bulk	Cartridge / Sachet Capacity	Cartridge Ratio	Maximum Thrust	Voltage	Material Viscosity	Pages
Battery Dispen	sers							
	B948 M	cartridge	200 ml (7 oz)	1:1	4 kN	18V	medium	32-33
	B983 M	cartridge	400 mL (14 oz)	1:1	5 kN	18 V	high	34-35
	B983 M-2:1	cartridge	400 mL (14 oz)	2:1	5 kN	18V	high	36-37
	B938 M	cartridge	400 mL (14 oz)	4:1	5 kN	18V	high	38–39
	B978 M	cartridge	400 mL (14 oz)	10:1	5 kN	18V	high	40-41
	B944 K	cartridge	385 mL (13.5 oz) 585 mL (20.6 oz)	3:1	2.7 kN	18V	low/medium	42-43
	B960 M	cartridge	350 mL (12.3 oz)	10:1	2.8 kN	18V	low/medium	44-45
	B985 M	cartridge	380 mL (13.4 oz)	10:1	2.75 kN	18V	low/medium	46-47
	B959 M	cartridge	450 mL (15.8 oz)	2:1	4.45 kN	18V	medium/high	48–49
	B988 M	cartridge	600 mL (21.1 oz)	1:1	4.73 kN	18V	medium	50-51
	B996 M	cartridge	750 ml (26.4 oz)	4:1	5 kN	18V	medium	52–53


Name/ Description	Cartridge/ Sachet/Bulk	Cartridge / Sachet Capacity	Cartridge Ratio	Maximum Thrust	Voltage	Material Viscosity	Pages
B998 M	cartridge	825 mL (29 oz)	10:1	5 kN	18 V	medium	54–55
B939 M	cartridge	900 ml (31.6 oz)	2:1	5 kN	18 V	medium/high	56–57
B999 M	cartridge	1500 mL (52.8 oz)	1:1	5 kN	18 V	medium	58-59

PRODUCT RANGES SMART DISPENSING FOR ALL APPLICATIONS.

	Name/ Description	Cartridge/ Sachet/Bulk	Cartridge / Sachet Capacity	Cartridge Ratio	Maximum Thrust	Pneumatic Pressure	Material Viscosity	Pages
Pneumatic Disp	ensers							
	TS408 HM-101	cartridge	50 mL (1.8 oz)	10:1	1.3 kN	8 bar / 116 psi	low	60-61
	TS408 MY-8	cartridge	50 mL (1.8 oz)	1:1, 2:1, 4:1, 10:1	1.3 kN	8 bar / 116 psi	low	62-63
	TS408M-75	cartridge	75 mL (1.8 oz)	1:1, 2:1, 4:1, 10:1	1.3 kN	8 bar / 116 psi	low	64–65
	TS408 EM	cartridge	50 mL (1.8 oz)	1:1, 2:1, 3:2	1.3 kN	8 bar / 116 psi	low	66–67
	TS408 BM	cartridge	50 mL (1.8 oz)	4:1,10:1	1.3 kN	8 bar / 116 psi	low	68–69
	TS483 XM	cartridge	400 mL (14 oz)	1:1	4 kN	8 bar / 116 psi	medium/high	70-71
	TS483 LXM	cartridge	400 mL (14 oz)	1:1	2.7 kN	8 bar / 116 psi	medium	72–73
	TS459 LXS	cartridge	450 mL (15.8 oz)	2:1	2.7 kN	8 bar / 116 psi	medium	74–75
	TS459 XM	cartridge	450 mL (15.8 oz)	2:1	4 kN	8 bar / 116 psi	medium	76–77
	TS444 KX	cartridge	365 mL (12.8 oz) 385 mL (13.5 oz) 585 mL (20.6 oz) 600 mL (21.1 oz) ecopaCC	3:1	4 kN	8 bar / 116 psi	medium	78–79
	TS447 X-625	cartridge	580 mL (20.4 oz)	1:1	6.25 kN	8 bar / 116 psi	high	80-81

Name/ Description	Cartridge/ Sachet/Bulk	Cartridge / Sachet Capacity	Cartridge Ratio	Maximum Thrust	Pneumatic Pressure	Material Viscosity	Pages
TS488 X	cartridge	600 mL (21.1 oz)	1:1	4 kN	8 bar / 116 psi	medium	82-83
TS488 XM	cartridge	600 mL (21.1 oz)	1:1	4 kN	8 bar / 116 psi	medium	84-85
TS493 X TS493 XT	cartridge	600 mL (21.1 oz)	1:1	4 kN	8 bar / 116 psi	medium	86–87
TS471	cartridge	1400 mL (49.3 oz)	3:1	8.3 kN	8 bar / 116 psi	medium/high	88–89

H8 XM 50 ML CARTRIDGE DISPENSER

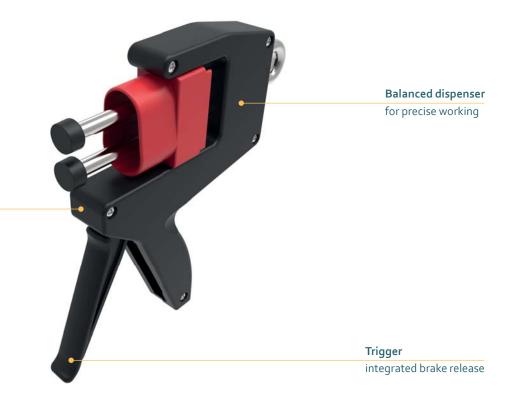

in reinforced nylon

Cartridge holder and handle

Model shown: H8 XM 50 mL

FEATURES

- Anti-drip, trigger integrated brake release
- Reinforced nylon frame and handle
- High gearing ratio
- One hand operation
- Customization possible

BENEFITS


- Fast, reliable clean application
- Easy handling for precise working
- Long life technology
- Lightweight and compact
- Customer labelling

APPLICATIONS





THE H8 XM 2-COMPONENT MANUAL DISPENSER HAS A LIGHT-WEIGHT COMPACT DESIGN WHILE THE HIGH GEARING RATIO OFFERS LONG LIFE TECHNOLOGY.

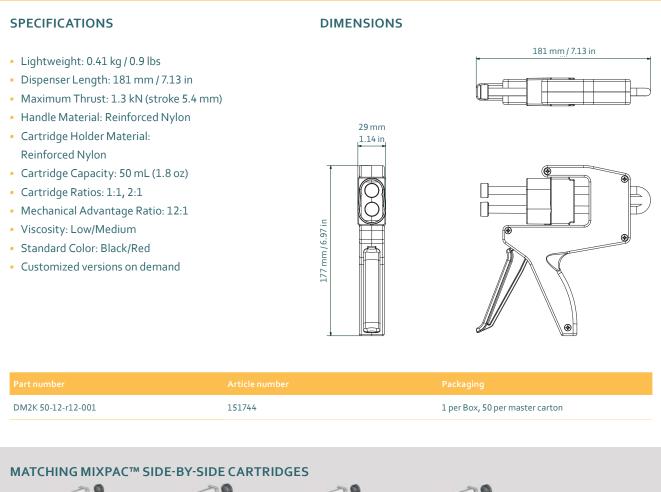



A-System 50 mL/1:1 PP/PA



50 mL/2:1 PP/PA





B-System 50 mL/2:1 PP/PA

COMPATIBLE CARTRIDGES



1 |

а

с

50 mL / 2:1 PP/PBT

4.27


Ø 0.89 Ø 0.71

1.81

Rectangular Flange Cartridge Rectangular Flange Cartridge 50 mL / 1:1 PP/PBT

99.7	3.93	I.	108.5
Ø 21.0	Ø 0.83	а	Ø 25.
46.0	1.81	b	Ø18.
		c	46.0

H236 M / H236 M-410 200 ML CARTRIDGE DISPENSER

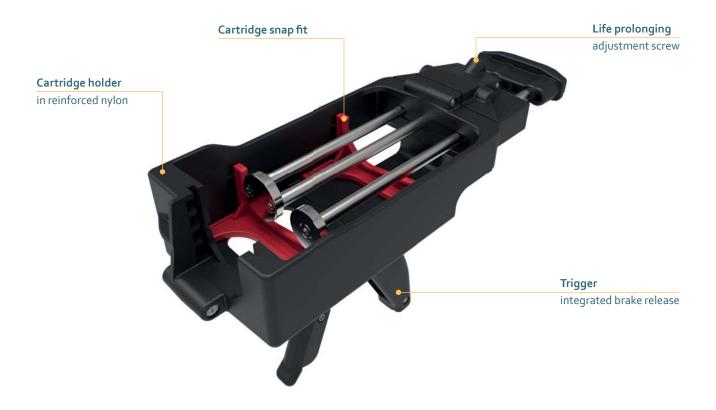

Model shown: H236 M 200 mL

FEATURES

- Fast, reliable and easy handling
- Cartridge positioning and fixation snap fit
- Life prolonging adjustment screw
- Lightweight reinforced nylon frame
- Customization possible

BENEFITS

- For precise working
- Easy cartridge ratio shift
- No loss of performance anti-wear
- One hand operation
- Customer labelling

APPLICATIONS







H236 M/M-410 2-COMPONENT MANUAL DISPENSER WITH LIFE PROLONGING ANTI-WEAR ADJUSTMENT SCREW AND EASY CARTRIDGE POSITIONING AND FIXATION SNAP FIT.

SPECIFICATIONS

- Lightweight: 1.07 kg / 2.3 lbs
- Cartridge Holder Length: 157 mm / 6.2 in
- Maximum Thrust: 5 kN (stroke 3.5 mm)
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Reinforced Nylon
- Cartridge Capacity: 200 mL (7 oz)
- Cartridge Ratios: 1:1, 2:1; 4:1, 10:1
- Mechanical Advantage Ratio: 26:1
- Viscosity: Low/Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS





Part number		
DM2K 200-12-r26-001	151746 (1:1, 2:1)	1/10 units per box
DM2K 200-410-r26-01	151745 (4:1, 10:1)	1/10 units per box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES

а

b

с



C-System/F-System 200 mL / 1:1 PP/PA

Plastic Cartridge

200 mL/1:1 PP

а

с

148.0 5.83 Ø 37.0 Ø 1.46

3.11

COMPATIBLE CARTRIDGES



C-System/F-System 200 mL / 2:1 PP/PA

Plastic Cartridge

200 mL / 2:1 PP

81.0

148.0 5.83

Ø 50.0 Ø 1.97

Ø31.0 Ø1.22

3.19



C-System/F-System 200 mL / 4:1 PP



Plastic Cartridge 200 mL / 4:1 PP/PBT

1	148.0	5.83
a	Ø 49.0	Ø1.93
b	Ø 25.0	Ø 0.98
с	77.0	3.03



C-System/F-System 200 mL / 10:1 PP/PA




Plastic Cartridge 200 mL / 10:1 PP/PBT

1	147.0	5.79
а	Ø 55.0	Ø 2.17
b	Ø19.0	Ø 0.75
с	78.0	3.07

CONVERSION KITS

79.0

H248 / H248 M **200 ML CARTRIDGE DISPENSER**

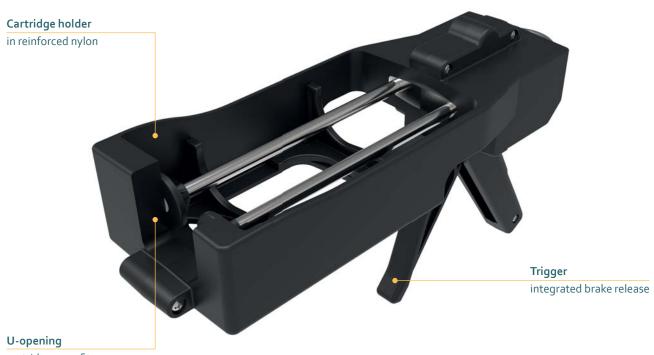

cartridge snap fit

Model shown: H248 200 mL

FEATURES

- Anti-drip and trigger integrated brake release
- Life prolonging adjustment screw
- Reinforced nylon barrel housing
- High gearing ratio
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Fast, reliable and clean application
- No loss of performance anti-wear
- Long life technology
- Easy handling for precise working
- Easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS




Chemical Anchoring




THE H248 2-COMPONENT MANUAL DISPENSER WITH REINFORCED U-OPENING BARREL AND HIGH GEARING RATIO OFFERS EASY HANDLING FOR PRECISE WORKING.


SPECIFICATIONS

- Lightweight: 0.82 kg / 1.8 lbs
- Cartridge Holder Length: 158 mm / 6.2 in
- Maximum Thrust: 3 kN (stroke 5 mm)
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Reinforced Nylon
- Cartridge Capacity: 200 mL (7 oz)
- Cartridge Ratio: 1:1
- Mechanical Advantage Ratio: 18:1
- Viscosity: Medium
- Standard Color: Black
- Customized versions on demand



DIMENSIONS





Part number		Packaging
DM2K 200-01-r18-201	154249 (H248) (For use with compatible cartridges)	10 per Box
DM2K 200-01-r18-101	151750 (H248M) (For use with MIXPAC cartridges)	10 per Box

MATCHING MIXPAC[™] CARTRIDGES



COMPATIBLE SIDE-BY-SIDE CARTRIDGES



Plastic Cartridge 200 mL / 1:1 PP

1	148.0	5.83
а	Ø 37.0	Ø1.46
с	79.0	3.11

CONVERSION KITS

H297 MN 330 ML CARTRIDGE DISPENSER



Model shown: H297 MN 330 mL

FEATURES

- Anti-drip and trigger integrated brake release
- Life prolonging adjustment screw
- Reinforced nylon barrel housing
- High gearing ratio
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Fast, reliable and clean application
- No loss of performance anti-wear
- Long life technology
- Easy handling for precise working
- Easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS





THE H297 MN 2-COMPONENT MANUAL DISPENSER'S ANTI-DRIP AND TRIGGER INTEGRATED BRAKE RELEASE DELIVERS A RELIABLE AND FAST APPLICATION.

SPECIFICATIONS DIMENSIONS 348 mm / 13.7 in • Lightweight: 0.8 kg / 1.8 lbs • Cartridge Holder Length: 250 mm / 9.8 in İΠ • Maximum Thrust: 5 kN (stroke 3.5 mm) U • Handle Material: Reinforced Nylon Cartridge Holder Material: 67 mm 250 mm / 9.8 in **Reinforced Nylon** 2.6 in • Cartridge Capacity: 330 mL (11.6 oz) • Cartridge Ratio: 10:1 192 mm / 7.56 in • Mechanical Advantage Ratio: 26:1 • Viscosity: Medium • Standard Color: Black • Customized versions on demand

Part number		Packaging
DM2K 330-10-r26-001	151769	10 per Box

MATCHING MIXPAC[™] COAXIAL CARTRIDGES



CONVERSION KITS

H297 IMN 330 ML CARTRIDGE DISPENSER



Model shown: H297 iMN 330 mL

FEATURES

- Anti-drip and trigger integrated brake release
- Life prolonging adjustment screw
- Reinforced nylon barrel housing
- High gearing ratio
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Fast, reliable and clean application
- No loss of performance anti-wear
- Long life technology
- Easy handling for precise working
- Easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS





THE H297 IMN 2-COMPONENT MANUAL DISPENSER OFFERS EASY HANDLING FOR PRECISE WORKING, WHILE THE INDICATOR ROD SHOWS YOU HOW MUCH MATERIAL IS LEFT IN THE CARTRIDGE.

SPECIFICATIONS DIMENSIONS 348 mm / 13.7 in • Lightweight: 0.8 kg / 2.1 lbs • Cartridge Holder Length: 243 mm / 9.6 in • Maximum Thrust: 5 kN (stroke 3.5 mm) • Handle Material: Reinforced Nylon Cartridge Holder Material: 67 mm 243 mm / 9.6 in **Reinforced Nylon** 2.6 in • Cartridge Capacity: 330 mL (11.6 oz) • Cartridge Ratio: 10:1 ۲ • Mechanical Advantage Ratio: 26:1 201 mm / 7.9 in • Viscosity: Medium • Standard Color: Black • Customized versions on demand

Part number		Packaging
DM2K 330-10-r26-101	151770	10 per Box

MATCHING MIXPAC[™] COAXIAL CARTRIDGES



CONVERSION KITS

H285 SM / H285 S 380 ML CARTRIDGE DISPENSER



Model shown: H285 sM 380 mL

FEATURES

- Anti-drip and trigger integrated brake release
- Life prolonging adjustment screw
- Reinforced nylon barrel housing
- High gearing ratio
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Fast, reliable and clean application
- No loss of performance anti-wear
- Long life technology
- Easy handling for precise working
- Easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS







THE H285 2-COMPONENT MANUAL DISPENSER IS DESIGNED FOR USE WITH MEDIUM VISCOSITY SEALANTS AND ADHESIVES. THE REINFORCED U-OPENING WITH CARTRIDGE SNAP FIT OFFERS EASY HANDLING FOR PRECISE WORKING.


SPECIFICATIONS

- Lightweight: 1.0 kg / 2.2 lbs
- Cartridge Holder Length: 222 mm / 8.75 in
- Maximum Thrust: 5 kN (stroke 3.5 mm)
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Reinforced Nylon
- Cartridge Capacity: 380 mL (13.4 oz)
- Cartridge Ratios: 5:1, 10:1
- Mechanical Advantage Ratio: 26:1
- Viscosity: Medium
- Standard Color: Black
- Customized versions on demand

DIMENSIONS







Part number		Packaging
DM2K 380-10-r26-101	151763 (H285 sM (10:1))	10 per Box
DM2K 380-05-r26-002	153461 (H285 S (5:1))	10 per Box

MATCHING MIXPAC[™] COAXIAL CARTRIDGES



COMPATIBLE COAXIAL CARTRIDGES

	1
15	0
aD	

Plastic Cartridge 380 mL / 5:1 PP/PA

1	183.0	7.2	1	183.0	7.2
а	Ø 63.0	Ø 2.5	а	Ø 63.0	Ø 2.5
b	Ø 25.2	Ø 0.99	b	Ø18.0	Ø 0.71

Plastic Cartridge

380 mL / 10:1 PP/PA

H260 / H260 M 345/350 ML CARTRIDGE DISPENSER



Model shown: H260 350 mL

FEATURES

- Anti-drip and trigger integrated brake release
- Life prolonging adjustment screw
- Reinforced nylon barrel housing
- High gearing ratio
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Fast, reliable and clean application
- No loss of performance anti-wear
- Long life technology
- Easy handling for precise working
- Easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS






THE H260 / 260 M 2-COMPONENT MANUAL DISPENSERS REINFORCED U-OPENING BARREL HOUSING WITH CARTRIDGE SNAP FIT AND HIGH GEARING RATIO OFFERS EASY HANDLING FOR PRECISE WORKING.

SPECIFICATIONS

- Lightweight: 0.9 kg / 1.9 lbs
- Cartridge Holder Length: 264 mm / 10.4 in
- Maximum Thrust: 5 kN (stroke 3.5 mm)
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Reinforced Nylon
- Cartridge Capacity: 345 mL (11.7 oz), 350 mL (12.3 oz)
- Cartridge Ratio: 10:1
- Mechanical Advantage Ratio: 26:1
- Viscosity: Medium
- Standard Color: Black
- Customized versions on demand

DIMENSIONS

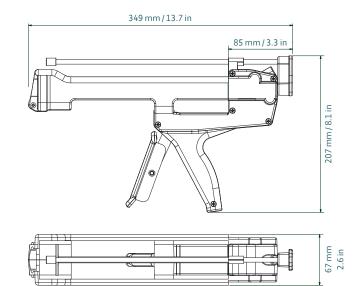

Part number		Packaging
DM2K 345-10-r26-201	151751 (H260 345 mL)	1 per Box, 10 per master carton
DM2K 350-10-r26-101	153353 (H260 M 350 mL)	1 per box, 10 per master carton

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



350 mL / 10:1 PP/PA

COMPATIBLE SIDE-BY-SIDE CARTRIDGES



345 mL / 10:1 PP/PA

215.0	8.48
Ø 50.0	Ø1.97
Ø18.0	Ø 0.71
69.0	2.72
	215.0 Ø 50.0 Ø 18.0

CONVERSION KITS

H244 S 385 ML CARTRIDGE DISPENSER



Model shown: H244 s 385 mL

FEATURES

- Anti-drip and trigger integrated brake release
- Life prolonging adjustment screw
- Reinforced nylon barrel housing
- High gearing ratio
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Fast, reliable and clean application
- No loss of performance anti-wear
- Long life technology
- Easy handling for precise working
- Easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS




Chemical Anchoring




THE H244 S 2-COMPONENT MANUAL DISPENSER'S ANTI-DRIP AND TRIGGER INTEGRATED BRAKE RELEASE GIVE A RELIABLE, FAST APPLICATION, WHILE THE LIFE PROLONGING ADJUSTMENT SCREW OFFERS LIFE-LONG TECHNOLOGY.


SPECIFICATIONS

- Lightweight: 1.22 kg / 2.6 lbs
- Cartridge Holder Length: 187 mm / 7.4 in
- Maximum Thrust: 5 kN (stroke 3.5 mm)
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Reinforced Nylon
- Cartridge Capacity: 385 mL (13.6 oz)
- Cartridge Ratio: 3:1
- Mechanical Advantage Ratio: 26:1
- Viscosity: High
- Standard Color: Black
- Customized versions on demand



DIMENSIONS





Part number		Packaging
DM2K 385-03-r26-001	153509	1 per box, 10 per master carton

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



COMPATIBLE SIDE-BY-SIDE CARTRIDGES




385 mL / 3:1 PP/PA

1	171.0	6.73
а	Ø 54.4	Ø 2.14
b	Ø 32.6	Ø1.28
С	90.0	3.54

CONVERSION KITS

H288 / H288 M / H288 N 600/620 ML CARTRIDGE DISPENSER

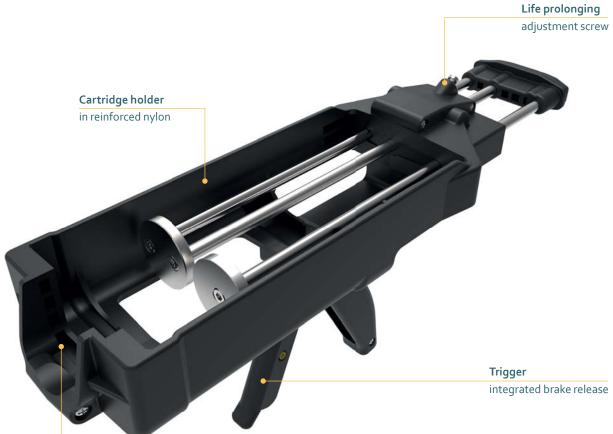

U-opening cartridge snap fit

Model shown: H288 380 mL

FEATURES

- Anti-drip and trigger integrated brake release
- Life prolonging adjustment screw
- Reinforced nylon barrel housing
- High gearing ratio
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Fast, reliable and clean application
- No loss of performance anti-wear
- Long life technology
- Easy handling for precise working
- Easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS






THE H288 / H288 M / H288 N 2-COMPONENT MANUAL DISPENSER IS DESIGNED FOR USE WITH MEDIUM VISCOSITY SEALANTS AND ADHESIVES WHILE THE ANTI-WEAR LIFE PROLONGING ADJUSTMENT SCREW OFFERS LIFE-LONG TECHNOLOGY.

SPECIFICATIONS

- Lightweight: 1.2 kg / 2.6 lbs
- Cartridge Holder Length: 231 mm / 9.1 in
- Maximum Thrust: 5 kN (stroke 3.5 mm)
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Reinforced Nylon
- Cartridge Capacity: 600 mL (21.1 oz), 620 mL (21.8 oz)
- Cartridge Ratio: 1:1
- Mechanical Advantage Ratio: 26:1
- Viscosity: Medium
- Standard Color: Black
- Customized versions on demand








Part number		Packaging
DM2K 620-01-r26-101	151765 (H288 (620 mL))	1 per box, 10 per master carton
DM2K 600-01-r26-401	151766 (H288 M J-System, ecopaCC)	1 per box, 10 per master carton
DM2K 600-01-r26-201	152494 (H288 N (600 mL))	1 per box, 10 per master carton

MATCHING MIXPAC[™] CARTRIDGES



H293 / H293 PM 450/600 ML CARTRIDGE DISPENSER



FEATURES

- Anti-drip and trigger integrated brake release
- Life prolonging adjustment screw
- Reinforced nylon barrel housing
- High gearing ratio
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Fast, reliable and clean application
- No loss of performance anti-wear
- Long life technology
- Easy handling for precise working
- Easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS



Chemical Anchoring




THE H293 / 293 PM 2-COMPONENT MANUAL DISPENSERS REINFORCED U-OPENING BARREL HOUSING WITH CARTRIDGE SNAP FIT AND HIGH GEARING RATIO OFFERS EASY HANDLING FOR PRECISE WORKING.

SPECIFICATIONS

- Lightweight: 1.2 kg / 2.6 lbs
- Cartridge Holder Length: 231 mm / 9.1 in
- Maximum Thrust: 5 kN (stroke 3.5 mm)
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Reinforced Nylon
- Cartridge Capacity: 450 mL (15.8 oz), 600 mL (21.1 oz)
- Cartridge Ratios: 1:1, 2:1
- Mechanical Advantage Ratio: 26:1
- Viscosity: High
- Standard Color: Black
- Customized versions on demand

DIMENSIONS





Part number		
DM2K 600-01-r26-101	151767 (H293 (600 mL))	1 per box, 10 per master carton
DM2K 450-02-r26-001	151768 (H293 PM (J-System 450 mL))	1 per box, 10 per master carton

MATCHING MIXPAC[™] CARTRIDGES



COMPATIBLE SIDE-BY-SIDE CARTRIDGES



600 mL / 1:1 PP

I.	217.0	8.54
а	Ø 48.0	Ø1.89
с	95.5	3.76

CONVERSION KITS

H239 900 ML CARTRIDGE DISPENSER



Model shown: H239 900 mL

FEATURES

- Anti-drip and trigger integrated brake release
- Life prolonging adjustment screw
- Reinforced nylon frame and handle
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Fast, reliable and clean application
- No loss of performance anti-wear
- Long life technology
- Easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS



Chemical Anchoring



THE H239 2-COMPONENT MANUAL DISPENSER IS FOR USE WITH HIGH VISCOSITY SEALANTS AND ADHESIVES, WHILE ANTI-DRIP AND TRIGGER INTEGRATED BRAKE RELEASE GIVE A RELIABLE, FAST APPLICATION.


SPECIFICATIONS

- Lightweight: 2.08 kg / 4.5 lbs
- Cartridge Holder Length: 235 mm / 9.25 in
- Maximum Thrust: 5 kN (stroke 3.5 mm)
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 900 mL (31.7 oz)
- Cartridge Ratio: 2:1
- Mechanical Advantage Ratio: 26:1
- Viscosity: High
- Standard Color: Black/Red
- Customized versions on demand

DIMENSIONS







Part number		
DM2K 1200-02-r26-001	151748	1 per box, 4 per master carton

MATCHING MIXPAC[™] CARTRIDGES

COMPATIBLE SIDE-BY-SIDE CARTRIDGES



T	255.0	8.86
а	Ø 69.0	Ø 2.72
b	Ø 50.0	Ø1.97
С	119.0	4.69

B948 M 200 ML CARTRIDGE DISPENSER



Model shown: B948 M 200 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- Charge time: 65 min (100%)
- For easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS







THE B948 M 2-COMPONENT BATTERY DISPENSER DUAL DRIVE RACK AND UNIQUE MEMORY FUNCTION REPRODUCES CONSISTENT DOSING EVERY TIME, WHILE THE BOSCH PROFESSIONAL 18 V RE-CHARGEABLE BATTERY OFFERS LONGER USAGE BETWEEN CHARGES.

SPECIFICATIONS

- Weight: 3.5 kg / 7.7 lbs
- Cartridge Holder Length: 200 mm / 7.9 in
- Maximum Thrust: 4 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 200 mL (7 oz)
- Cartridge Ratio: 1:1
- Viscosity: High
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 200-01-500-001	153190	1 per Box

MATCHING MIXPAC[™] CARTRIDGES



COMPATIBLE SIDE-BY-SIDE CARTRIDGES




Plastic Cartridge 200 mL / 1:1 PP

1	148.0	5.83
а	Ø 37.0	Ø1.46
с	79.0	3.11

MATCHING ACCESSORIES

Batteries and chargers on pages 90.

B983 M 400 ML CARTRIDGE DISPENSER

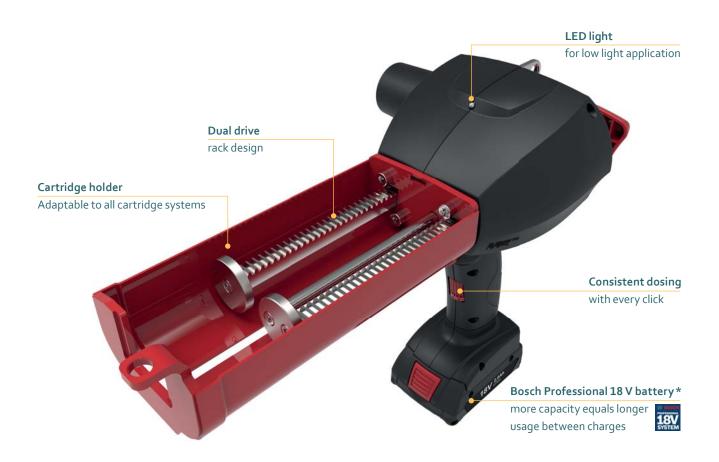

Model shown: B983 M 400 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- Charge time: 65 min (100%)
- For easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS







THE B983 M 2-COMPONENT BATTERY DISPENSERS U-OPENING STEEL FRAME ALLOWS FOR EASY INSERTION AND REMOVAL OF CARTRIDGES, WHILE THE BOSCH PROFESSIONAL 18 V RE-CHARGEABLE BATTERY OFFERS LONGER USAGE BETWEEN CHARGES.

SPECIFICATIONS

- Weight: 3.5 kg / 7.7 lbs
- Cartridge Holder Length: 200 mm / 7.9 in
- Maximum Thrust: 5 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 400 mL (14 oz)
- Cartridge Ratio: 1:1
- Viscosity: High
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 400-01-500-001	152603	1 per Box
DB2K 400-01-500-1US	152604 (US)	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



400 mL / 1:1 PP/PA



400 mL / 1:1 PP/PBT

COMPATIBLE CARTRIDGES



Plastic Cartridge 400 mL / 1:1 PP/PBT

1	185.0	7.28
а	Ø 45.0	Ø1.77
С	93.0	3.66

MATCHING ACCESSORIES

Batteries and chargers on pages 90.

B983 M-2:1 400 ML CARTRIDGE DISPENSER



Model shown: B983 M-2:1 400 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- Charge time: 65 min (100%)
- For easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS







THE B983 M-2:1 2-COMPONENT BATTERY DISPENSER IS DESIGNED FOR USE WITH HIGH VISCOSITY SEALANTS AND ADHESIVES, WHILE THE DUAL DRIVE RACK AND UNIQUE MEMORY FUNCTION REPRODUCES CONSISTENT DOSING EVERY TIME.

SPECIFICATIONS

- Weight: 3.5 kg / 7.7 lbs
- Cartridge Holder Length: 202 mm / 7.95 in
- Maximum Thrust: 5 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 400 mL (14 oz)
- Cartridge Ratio: 2:1
- Viscosity: High
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 400-02-500-001	152605	1 per Box
DB2K 400-02-500-1US	152606 (US)	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



400 mL / 2:1 PP/PA



COMPATIBLE CARTRIDGES



400 mL / 2:1 PP/PBT

T	185.0	7.28
a	Ø 47.0	Ø1.85
b	Ø 33.0	Ø1.3
с	96.0	3.78

CONVERSION KITS

B938 M 400 ML CARTRIDGE DISPENSER



Model shown: B938 M 400 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- Charge time: 65 min (100%)
- For easy insertion and removal of cartridges
- Customer labelling







THE B938 M 2-COMPONENT BATTERY DISPENSER IS DESIGNED FOR USE WITH HIGH VISCOSITY SEALANTS AND ADHESIVES, WHILE THE DUAL DRIVE RACK AND UNIQUE MEMORY FUNCTION REPRODUCES CONSISTENT DOSING EVERY TIME.

SPECIFICATIONS

- Weight: 3.5 kg / 7.7 lbs
- Cartridge Holder Length: 202 mm / 7.95 in
- Maximum Thrust: 5 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 400 mL (14 oz)
- Cartridge Ratio: 4:1
- Viscosity: High
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 400-04-500-001	152607	1 per Box
DB2K 400-04-500-1US	152608 (US)	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES




400 mL / 4:1 PP



COMPATIBLE CARTRIDGES

B978 M 400 ML CARTRIDGE DISPENSER

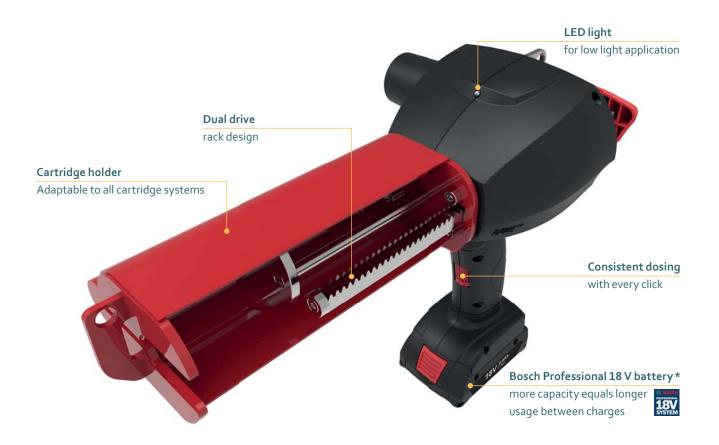

Model shown: B978 M 400 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- Charge time: 65 min (100%)
- For easy insertion and removal of cartridges
- Customer labelling







THE B978 M 2-COMPONENT BATTERY DISPENSER DUAL DRIVE RACK AND UNIQUE MEMORY FUNCTION REPRODUCES CONSISTENT DOSING EVERY TIME, WHILE THE THE BOSCH PRO-FESSIONAL 18 V RE-CHARGEABLE BATTERY OFFERS LONGER USAGE BETWEEN CHARGES.

SPECIFICATIONS

- Weight: 3.5 kg / 7.7 lbs
- Cartridge Holder Length: 199 mm / 7.8 in
- Maximum Thrust: 5 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 400 mL (14 oz)
- Cartridge Ratio: 10:1
- Viscosity: High
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 400-10-500-001	152609	1 per Box
DB2K 400-10-500-1US	152610 (US)	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



400 mL / 10:1 PP




COMPATIBLE CARTRIDGES

1
ca
Plastic Cartridge
400 mL / 10:1 PP/PBT

1	185.0	7.28
а	Ø 65.0	Ø 2.56
b	Ø19.5	Ø 0.77
С	94.0	3.7

MATCHING ACCESSORIES

B944 K 365/385/585 ML CARTRIDGE DISPENSER

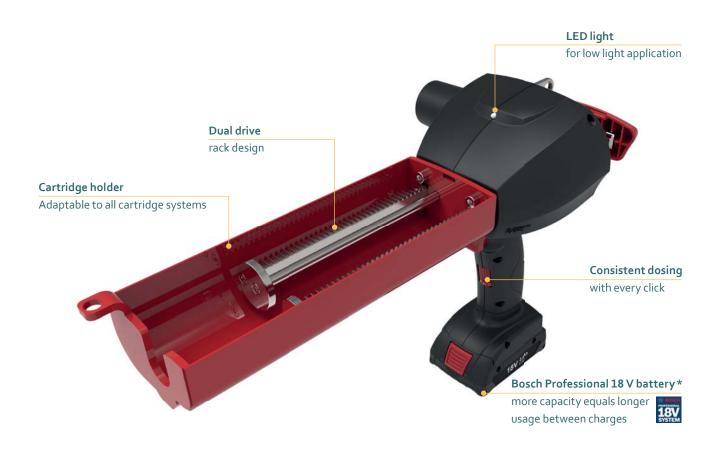

Model shown: B944 K 585 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery Charge time: 65 min (100%)
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- U-opening with cartridge snap fit For easy insertion and removal of cartridges
 - Customer labelling

APPLICATIONS






THE B944 K 2-COMPONENT BATTERY DISPENSER IS DESIGNED FOR USE WITH LOW TO MEDIUM VISCOSITY SEALANTS AND ADHESIVES, WHILE THE THE BOSCH PROFESSIONAL 18 V RE-CHARGEABLE BATTERY OFFERS LONGER USAGE BETWEEN CHARGES.

SPECIFICATIONS

- Weight: 3.5 kg / 7.7 lbs
- Cartridge Holder Length: 265 mm / 10.4 in
- Maximum Thrust: 2.7 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 365 mL (12.3 oz), 385 mL (13.5 oz), 585 mL (20.6 oz)
- Cartridge Ratio: 3:1
- · Viscosity: Low/Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 585-03-270-001	154476	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



CONVERSION KITS

MATCHING ACCESSORIES

B960 M 350 ML CARTRIDGE DISPENSER



Model shown: B960 M 345 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery Charge time: 65 min (100%)
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- For easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS







THE B960 M 2-COMPONENT BATTERY DISPENSER OFFERS CONSISTENT DOSING WITH EVERY CLICK, WHILE ACCIDENTAL MATERIAL DISCHARGE IS PREVENTED WITH THE BUILT-IN ANTI-DRIP MECHANISM.

SPECIFICATIONS

- Weight: 3.4 kg / 7.4 lbs
- Cartridge Holder Length: 232 mm / 9.1 in
- Maximum Thrust: 2.8 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 350 mL (12.3 oz)
- Cartridge Ratio: 10:1
- Viscosity: Low/Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 350-10-280-001	152602	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



350 mL/10:1 PA

COMPATIBLE CARTRIDGES



345 mL / 10:1 PP/PA

1	215.0	8.46
а	Ø 50.0	Ø1.97
b	Ø18.0	Ø0.71
с	69.0	2.72

CONVERSION KITS

B985 M 380 ML CARTRIDGE DISPENSER



Model shown: B985 M 380 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery Charge time: 65 min (100%)
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- U-opening with cartridge snap fit For easy insertion and removal of cartridges
 - Customer labelling

APPLICATIONS







THE B985 M 2-COMPONENT BATTERY DISPENSER IS DESIGNED FOR USE WITH LOW TO MEDIUM VISCOSITY SEALANTS AND ADHESIVES. THE DUAL DRIVE RACK AND UNIQUE MEMORY FUNCTION REPRODUCES CONSISTENT DOSING EVERY TIME.

SPECIFICATIONS

- Weight: 3.3 kg / 7.3 lbs
- Cartridge Holder Length: 204 mm / 8.0 in
- Maximum Thrust: 2.75 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 380 mL (13.4 oz)
- Cartridge Ratio: 10:1
- Viscosity: Low/Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		
DB2K 380-10-275-101	158093	1 per Box

MATCHING MIXPAC[™] COAXIAL CARTRIDGES



COMPATIBLE CARTRIDGES



Plastic Cartridge 380 mL / 10:1 PP/PA

T	183.0	7.2
а	Ø 63.0	Ø 2.5
b	Ø18.0	Ø 0.71

MATCHING ACCESSORIES

B959 M 450 ML CARTRIDGE DISPENSER



Model shown: B959 M 450 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery Charge time: 65 min (100%)
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- U-opening with cartridge snap fit For easy insertion and removal of cartridges
 - Customer labelling

APPLICATIONS







THE B959 M 2-COMPONENT BATTERY DISPENSERS U-OPENING STEEL FRAME ALLOWS FOR EASY INSERTION AND REMOVAL OF CARTRIDGES, WHILE THE DUAL DRIVE RACK AND UNIQUE MEMORY FUNCTION REPRODUCES CONSISTENT DOSING EVERY TIME.

SPECIFICATIONS

- Weight: 3.5 kg / 7.7 lbs
- Cartridge Holder Length: 229 mm / 9.0 in
- Maximum Thrust: 4.45 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 450 mL (15.8 oz)
- Cartridge Ratio: 2:1
- Viscosity: Low/Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 450-02-445-101	152611	1 per Box
DB2K 450-02-445-1US	152612 (US)	1 per Box

MATCHING MIXPAC[™] COAXIAL CARTRIDGES



450 mL / 2:1 PA/PP

COMPATIBLE CARTRIDGES



Plastic Cartridge 450 mL / 2:1 PP/PA

1	215.0	8.46
а	Ø 49.5	Ø1.95
b	Ø36.2	Ø1.43
с	86.0	3.39

CONVERSION KITS

B988 M **600 ML CARTRIDGE DISPENSER**



Model shown: B988 M 600 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery Charge time: 65 min (100%)
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- For easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS







THE B988 M 2-COMPONENT BATTERY DISPENSER IS DESIGNED FOR USE WITH MEDIUM VISCOSITY SEALANTS AND ADHESIVES, WHILE THE BOSCH PROFESSIONAL 18 V RE-CHARGEABLE BATTERY OFFERS LONGER USAGE BETWEEN CHARGES.

SPECIFICATIONS

- Weight: 3.6 kg / 7.9 lbs
- Cartridge Holder Length: 234 mm / 9.2 in
- Maximum Thrust: 4.73 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 600 mL (21.1 oz)
- Cartridge Ratio: 1:1
- Viscosity: Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 600-01-473-1US	152613 (US)	1 per Box
DB2K 600-01-473-101	152454	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



600 mL / 1:1 PP



COMPATIBLE CARTRIDGES




600 mL / 1:1 PP

I.	217.0	8.54
а	Ø48.0	Ø1.89
с	95.5	3.76

MATCHING ACCESSORIES

B996 M 750 ML CARTRIDGE DISPENSER

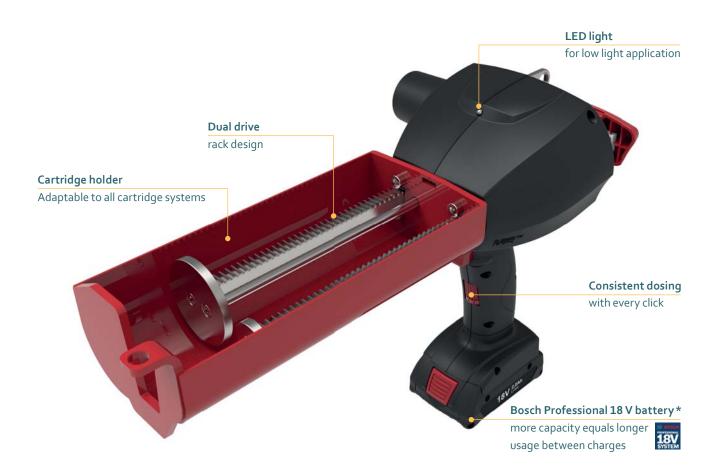

Model shown: B996 M 750 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- Charge time: 65 min (100%)
- For easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS







THE B996 2-COMPONENT BATTERY DISPENSER IS DESIGNED FOR USE WITH MEDIUM TO HIGH VISCOSITY SEALANTS AND ADHESIVES AND BUILT-IN ANTI-DRIP FUNCTION FOR CLEAN EFFICIENT WORKING.

SPECIFICATIONS

- Weight: 3.7 kg / 8.1 lbs
- Cartridge Holder Length: 237 mm / 9.3 in
- Maximum Thrust: 5.0 kN
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 750 mL (25.4 oz)
- Cartridge Ratio: 4:1
- Viscosity: Low/Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 750-04-500-001	178345	1 per Box

MATCHING MIXPAC[™] CARTRIDGES

COMPATIBLE CARTRIDGES



1	217.0	8.54
а	Ø 68.0	Ø 2.68
b	Ø 34.0	Ø1.34
С	102.0	4.0

B998 M **825 ML CARTRIDGE DISPENSER**



Model shown: B998 M 825 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery Charge time: 65 min (100%)
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- U-opening with cartridge snap fit For easy insertion and removal of cartridges
 - Customer labelling

APPLICATIONS







THE B998 M 2-COMPONENT BATTERY DISPENSER DUAL DRIVE RACK AND UNIQUE MEMORY FUNCTION REPRODUCES CONSISTENT DOSING EVERY TIME, WHILE THE BOSCH PRO-FESSIONAL 18 V RE-CHARGEABLE BATTERY OFFERS LONGER USAGE BETWEEN CHARGES.

SPECIFICATIONS

- Weight: 3.7 kg / 8.1 lbs
- Cartridge Holder Length: 232 mm / 9.1 in
- Maximum Thrust: 5 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 825 mL (29 oz)
- Cartridge Ratio: 10:1
- Viscosity: Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 825-10-500-101	152614	1 per Box
DB2K 825-10-500-1US	152615 (US)	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



COMPATIBLE CARTRIDGES




825 mL / 10:1 PP

1	216.0	8.5
а	Ø 80.7	Ø 3.18
b	Ø 28.6	Ø1.13
с	109.0	4.29

CONVERSION KITS

B939 M 900 ML CARTRIDGE DISPENSER

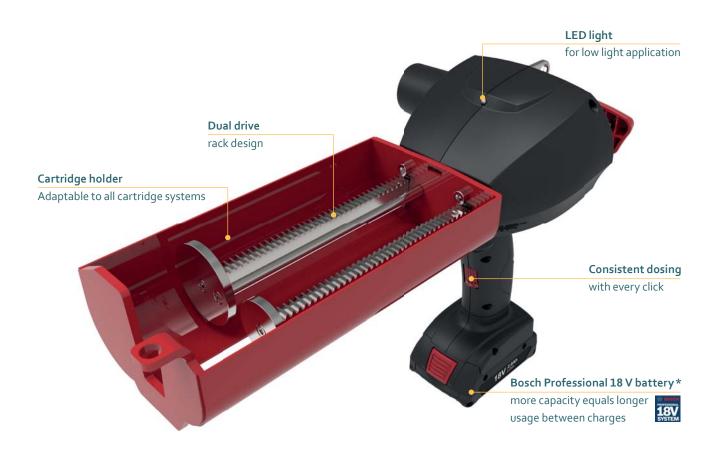

Model shown: B939 M 900 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery
- U-opening with cartridge snap fit
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- Charge time: 65 min (100%)
- For easy insertion and removal of cartridges
- Customer labelling

APPLICATIONS







THE B939 2-COMPONENT BATTERY DISPENSER IS DESIGNED FOR USE WITH MEDIUM TO HIGH VISCOSITY SEALANTS AND ADHESIVES, WHILE THE BOSCH PROFESSIONAL 18 V RE-CHARGEABLE BATTERY OFFERS LONGER USAGE BETWEEN CHARGES.

SPECIFICATIONS

- Weight: 3.5 kg / 7.7 lbs
- Cartridge Holder Length: 237 mm / 9.3 in
- Maximum Thrust: 5.0 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 900 mL (30.4 oz)
- Cartridge Ratio: 2:1
- Viscosity: Medium/High
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 900-02-500-001	178336	1 per Box

MATCHING MIXPAC[™] CARTRIDGES

COMPATIBLE CARTRIDGES



1	215.0	8.46
а	Ø 69.0	Ø 2.72
b	Ø 50.0	Ø1.97
с	119.0	4.69

B999 M 1500 ML CARTRIDGE DISPENSER



Model shown: B999 M 1500 mL

FEATURES

- Unique memory function
- Dual drive rack design
- Anti-drip function
- 18 V Li-ion high performance battery Charge time: 65 min (100%)
- Customization possible

BENEFITS

- Consistent dosing with every click
- Reproduces quality of each adhesive
- Clean and efficient working
- U-opening with cartridge snap fit For easy insertion and removal of cartridges
 - Customer labelling

APPLICATIONS







THE B999 M 2-COMPONENT BATTERY DISPENSER DUAL DRIVE **RACK AND UNIQUE MEMORY FUNCTION REPRODUCES CONSIST-**ENT DOSING EVERY TIME. ACCIDENTAL MATERIAL DISCHARGE IS PREVENTED WITH THE BUILT-IN ANTI-DRIP MECHANISM.

SPECIFICATIONS

- Weight: 4.2 kg / 7.9 lbs
- Cartridge Holder Length: 233 mm / 9.2 in
- Maximum Thrust: 5 kN (5 mm/s)
- Voltage: 18 V
- Battery Capacity: 2.0 Ah
- Battery Charge Time: 65 min (100%)
- Battery Type: Li-ion
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Steel
- Cartridge Capacity: 1500 mL (52.8 oz)
- Cartridge Ratio: 1:1
- Viscosity: Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DB2K 1500-01-500-01	152616	1 per Box
DB2K 1500-01-500-1US	152617 (US)	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



J-System 1500 mL / 1:1 PP



COMPATIBLE CARTRIDGES



1500 mL / 1:1 PP

1	215.0	8.46
а	Ø 79.0	Ø 3.11
с	160.0	6.3

MATCHING ACCESSORIES

TS408 HM-101 50 ML CARTRIDGE DISPENSER



Model shown: TS408 HM-101 50 mL

FEATURES

- Quick cartridge exchange
- One hand pressure adjustment
- Anti-drip function
- Reinforced nylon handle
- Customization possible

BENEFITS

- For efficient working
- Simple dispensing, effective working
- Clean application
- Compact and lightweight
- Customer labelling







THE TS408 HM-101 2-COMPONENT PNEUMATIC DISPENSER OFFERS QUICK CARTRIDGE EXCHANGE FOR EFFICIENT WORKING ACROSS ALL YOUR APPLICATIONS WHILE THE ANTI-DRIP FUNCTION MAKES FOR EASY AND CLEAN DISPENSING.


SPECIFICATIONS

- Light weight: 0.73 kg / 1.6 lbs
- Dispenser Length: 184 mm / 7.2 in
- Maximum Thrust: 1.3 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Reinforced Nylon
- Cartridge Capacity: 50 mL (1.8 oz)
- Cartridge Ratio: 10:1
- Viscosity: Low
- Standard Color: Black
- Customized versions on demand

DIMENSIONS







Part number		Packaging
DP2K S50-10-130-001	151886	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



50 mL / 10:1 PP/PBT

COMPATIBLE SIDE-BY-SIDE CARTRIDGES



Round Flange Cartridge 50 mL / 10:1 PP/PBT

1	102.0	4.02
а	Ø 30.0	Ø1.18
b	Ø10.8	Ø 0.43
с	44.0	1.73

CONVERSION KITS

TS408 MY-8 50 ML CARTRIDGE DISPENSER



FEATURES

- Quick cartridge exchange
- One hand pressure adjustment
- Anti-drip function
- Reinforced nylon handle
- Customization possible

BENEFITS

- For efficient working
- Simple dispensing, effective working
- Clean application
- Compact and lightweight
- Customer labelling







THE TS408 MY-8 2-COMPONENT PNEUMATIC DISPENSERS ONE-HANDED PRESSURE ADJUSTMENT ALLOWS FOR SIMPLE EFFECTIVE **OPERATION WHILE THE QUICK CARTRIDGE EXCHANGE OFFERS EFFICIENT WORKING ACROSS ALL YOUR APPLICATIONS.**

SPECIFICATIONS

- Lightweight: 0.73 kg / 1.6 lbs
- Dispenser Length: 303 mm / 11.9 in
- Maximum Thrust: 1.3 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: **Reinforced Nylon**
- Cartridge Capacity: 50 mL (1.8 oz), 75 mL (2.7 oz)
- Cartridge Ratios: 1:1, 2:1, 4:1, 10:1
- Viscosity: High
- Standard Color: Black
- Customized versions on demand

DIMENSIONS







Part number		Packaging
DP2K 050-MR-130-001	151780 (50 mL)	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



A-System

50 mL/1:1 PP/PA



lar Flange



A-System 50 mL / 2:1 PP/PA



A-System

50 mL/4:1 PP/PA




A-System 50 mL / 10:1 PP/PA

COMPATIBLE CARTRIDG	ES
---------------------	----



Rectangular Cartridg 50 mL/1:1 P

Flange	Rectangular Flange		
je	Cartridge		
P/PBT	50 mL / 2:1 PP/PBT		





Rectangular Flange Cartridge 50 mL / 4:1 PP/PBT


108.5 4.27

Ø250 Ø089


Ø13.0 Ø0.51

1.81

46.0




ca





MATCHING ACCESSORIES

TS408 M-75 75 ML CARTRIDGE DISPENSER

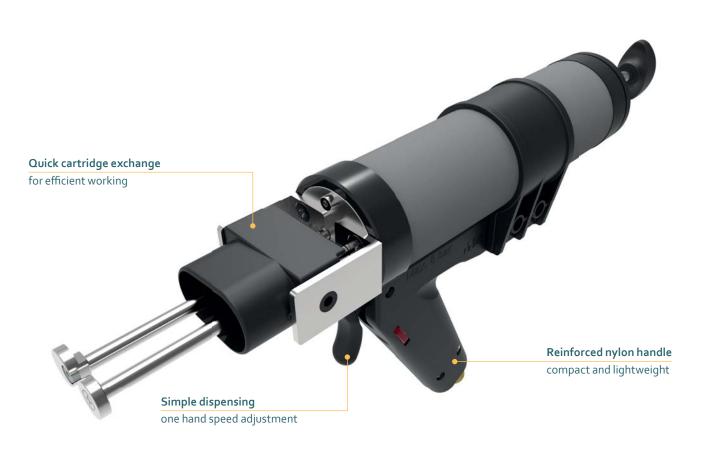

Model shown: TS408 M-75 75 mL

FEATURES

- Quick cartridge exchange
- One hand pressure adjustment
- Anti-drip function
- Reinforced nylon handle
- Customization possible

BENEFITS

- For efficient working
- Simple dispensing, effective working
- Clean application
- Compact and lightweight
- Customer labelling






THE TS408 M-75 2-COMPONENT PNEUMATIC DISPENSERS ONE-HANDED PRESSURE ADJUSTMENT ALLOWS FOR SIMPLE EFFECTIVE OPERATION WHILE THE QUICK CARTRIDGE EXCHANGE OFFERS EFFICIENT WORKING ACROSS ALL YOUR APPLICATIONS.

SPECIFICATIONS

- Lightweight: 0.73 kg / 1.6 lbs
- Dispenser Length: 390 mm / 11.9 in
- Maximum Thrust: 1.3 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material:
 Reinforced Nylon
- Cartridge Capacity: 75 mL (2.7 oz)
- Cartridge Ratio: 1:1
- Viscosity: High
- Standard Color: Black
- Customized versions on demand

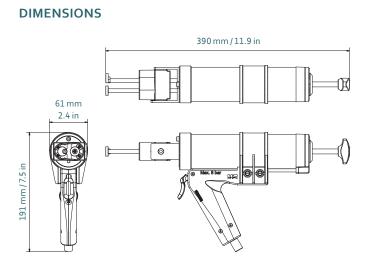

Part number		Packaging
DP2K 075-MR-130-001	153098 (75 mL)	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



COMPATIBLE CARTRIDGES

MATCHING ACCESSORIES

TS408 EM 50 ML CARTRIDGE DISPENSER



FEATURES

- Quick cartridge exchange
- One hand pressure adjustment
- Anti-drip function
- Reinforced nylon handle
- Customization possible

BENEFITS

- For efficient working
- Simple dispensing, effective working
- Clean application
- Compact and lightweight
- Customer labelling






THE TS408 EM 2-COMPONENT PNEUMATIC DISPENSERS ONE-HANDED PRESSURE ADJUSTMENT ALLOWS FOR SIMPLE EFFECTIVE OPERATION, WHILE THE ANTI-DRIP FUNCTION MAKES FOR EASY AND CLEAN DISPENSING.


SPECIFICATIONS

- Lightweight: 0.73 kg / 1.6 lbs
- Dispenser Length: 232 mm / 9.1 in
- Maximum Thrust: 1.3 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Reinforced Nylon
- Cartridge Capacity: 50 mL (1.8 oz)
- Cartridge Ratios: 1:1, 2:1, 3:2
- Viscosity: High
- Standard Color: Black
- Customized versions on demand

DIMENSIONS







DP2K 050-12-130-101 151781 1 per Box	

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES





Rectangular/Round Flange Cartridge

50 mL / 2:1 PP/PBT

108.5 4.27

c 46.0 1.81

a Ø25.0 Ø0.89 b Ø18.0 Ø0.71

1









BS-System

50 mL/2:1 PP



BS-System 50 mL / 3:2 PP

A-System 50 mL / 1:1 PP/PA

Rectangular/Round

Flange Cartridge 50 mL / 1:1 PP/PBT

I 99.7 3.93

46.0

cat

COMPATIBLE CARTRIDGES

B-System 50 mL / 1:1 PP/PA

A-System 50 mL / 2:1 PP/PA





BS-System 50 mL / 1:1 PP/PA





CONVERSION KITS

a Ø21.0 Ø0.83 a

1 81

TS408 BM 50 ML CARTRIDGE DISPENSER



Model shown: TS408 BM 50 mL

FEATURES

- Quick cartridge exchange
- One hand pressure adjustment
- Anti-drip function
- Reinforced nylon handle
- Customization possible

BENEFITS

- For efficient working
- Simple dispensing, effective working
- Clean application
- Compact and lightweight
- Customer labelling






THE TS408 BM 2-COMPONENT PNEUMATIC DISPENSERS ANTI-DRIP FUNCTION MAKES FOR EASY AND CLEAN DISPENSING. A ONE-HANDED PRESSURE ADJUSTMENT ALLOWS FOR SIMPLE **EFFECTIVE OPERATION.**

SPECIFICATIONS

- Lightweight: 0.73 kg / 1.6 lbs
- Dispenser Length: 344 mm / 13.5 in
- Maximum Thrust: 1.3 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: **Reinforced Nylon**
- Cartridge Capacity: 50 mL (1.8 oz)
- Cartridge Ratio: 4:1, 10:1
- Viscosity: High
- Standard Color: Black
- Customized versions on demand

DIMENSIONS







Part number		Packaging
DP2K 050-41-130-001	153094	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



B-System 50 mL / 4:1 PP/PBT



COMPATIBLE CARTRIDGES





50 mL / 10:1 PP/PBT

Rectangular Flange Cartridge Rectangular Flange Cartridge 50 mL / 4:1 PP/PBT

I.	108.5	4.27	1	102.0	4.02
а	Ø 25.0	Ø 0.89	а	Ø 30.0	Ø1.18
b	Ø13.0	Ø 0.51	b	Ø10.8	Ø 0.43
с	46.0	1.81	С	44.0	1.73

CONVERSION KITS

MATCHING ACCESSORIES

TS483 XM 400 ML CARTRIDGE DISPENSER



Model shown: TS483 XM 400 mL

FEATURES

- Air operated plunger retraction
- One hand pressure adjustment
- Anti-drip function
- Long life technology
- Customization possible

BENEFITS

- Quick cartridge exchange
- Simple dispensing speed adjustment
- Clean application
- Precise working
- Customer labelling







THE TS483 XM IS A 2-COMPONENT PNEUMATIC DISPENSER DESIGNED FOR USE WITH MEDIUM TO HIGH VISCOSITY SEALANTS AND ADHESIVES. A ONE-HANDED PRESSURE ADJUSTMENT ALLOWS FOR SIMPLE EFFECTIVE OPERATION.

SPECIFICATIONS

- Lightweight: 2.6 kg / 5.6 lbs
- Cartridge Holder Length: 203 mm / 8.0 in
- Maximum Thrust: 4 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Aluminum
- Frame Material: Steel
- Cartridge Capacity: 400 mL (14.1 oz)
- Cartridge Ratio: 1:1
- Viscosity: Medium/High
- Standard Color: Black/Red
- Customized versions on demand

DIMENSIONS





Part number		Packaging
DP2K 400-01-400-001	152309	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



400 mL / 1:1 PP/PA



400 mL / 1:1 PP/PBT

COMPATIBLE SIDE-BY-SIDE CARTRIDGES



400 mL / 1:1 PP/PBT

1	185.0	7.28
а	Ø 45.0	Ø1.77
с	93.0	3.66

CONVERSION KITS

TS483 LXM 400 ML CARTRIDGE DISPENSER



Model shown: TS483 LXM 400 mL

FEATURES

- Air operated plunger retraction
- One hand pressure adjustment
- Anti-drip function
- Long life technology
- Customization possible

BENEFITS

- Quick cartridge exchange
- Simple dispensing speed adjustment
- Clean application
- Precise working
- Customer labelling







THE TS483 LXM 2-COMPONENT PNEUMATIC DISPENSERS QUICK CARTRIDGE EXCHANGE OFFERS EFFICIENT WORKING ACROSS ALL YOUR APPLICATIONS. THE ANTI-DRIP FUNCTION MAKES FOR EFFICIENT DISPENSING.

SPECIFICATIONS

- Lightweight: 2.6 kg / 5.6 lbs
- Cartridge Holder Length: 201 mm / 7.9 in
- Maximum Thrust: 2.7 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Aluminum
- Frame Material: Steel
- Cartridge Capacity: 400 mL (14.1 oz)
- Cartridge Ratio: 1:1
- Viscosit: Low/Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS



Part number		Packaging
DP2K 400-01-270-001	151788	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



400 mL / 1:1 PP/PA



COMPATIBLE SIDE-BY-SIDE CARTRIDGES



400 mL / 1:1 PP/PBT

T	185.0	7.28
а	Ø 45.0	Ø1.77
с	93.0	3.66

CONVERSION KITS

TS459 LXS 450 ML CARTRIDGE DISPENSER



Model shown: TS459 LXS 450 mL

FEATURES

- Air operated plunger retraction
- One hand pressure adjustment
- Anti-drip function
- Long life technology
- Customization possible

BENEFITS

- Quick cartridge exchange
- Simple dispensing speed adjustment
- Clean application
- Precise working
- Customer labelling

APPLICATIONS




Chemical Anchoring




THE TS459 LXS 2-COMPONENT PNEUMATIC DISPENSERS QUICK CARTRIDGE EXCHANGE OFFERS EFFICIENT WORKING ACROSS ALL YOUR APPLICATIONS.


SPECIFICATIONS

- Lightweight: 2.69 kg / 5.9 lbs
- Cartridge Holder Length: 237 mm / 9.3 in
- Maximum Thrust: 2.7 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Aluminum
- Frame Material: Steel
- Cartridge Capacity: 450 mL (15.8 oz)
- Cartridge Ratio: 2:1
- Viscosity: Medium/High
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS





Part number		Packaging
DP2K 450-02-270-001	152515	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



450 mL/2:1 PP/PA

COMPATIBLE CARTRIDGES



450 mL / 2:1 PP

1	215.0	8.46
а	Ø46.5	Ø1.83
b	Ø 33.2	Ø1.31
С	86.0	3.39

CONVERSION KITS

TS459 XM 450 ML CARTRIDGE DISPENSER



Model shown: TS459 XM 450 mL

FEATURES

- Air operated plunger retraction
- One hand pressure adjustment
- Anti-drip function
- Long life technology
- Customization possible

BENEFITS

- Quick cartridge exchange
- Simple dispensing speed adjustment
- Clean application
- Precise working
- Customer labelling






THE TS459 XM 2-COMPONENT PNEUMATIC DISPENSERS ONE-HANDED PRESSURE ADJUSTMENT ALLOWS FOR SIMPLE EFFECTIVE OPERATION WHILE THE ANTI-DRIP FUNCTION MAKES FOR EASY AND CLEAN DISPENSING.


SPECIFICATIONS

- Lightweight: 2.69 kg / 5.9 lbs
- Cartridge Holder Length: 218 mm / 8.6 in
- Maximum Thrust: 4.5 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Aluminum
- Frame Material: Steel
- Cartridge Capacity: 450 mL (15.8 oz)
- Cartridge Ratio: 2:1
- Viscosity: Medium
- Standard Color: Black
- Customized versions on demand



DIMENSIONS





Part number		Packaging
DP2K 450-02-400-101	152516	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



450 mL/2:1 PP/PA

COMPATIBLE CARTRIDGES



450 mL / 2:1 PP

I.	215.0	8.46
а	Ø46.5	Ø1.83
b	Ø 33.2	Ø1.31
С	86.0	3.39

CONVERSION KITS

TS444 KX 365/385/585 ML CARTRIDGE DISPENSER



Model shown: TS444 KX 585 mL

FEATURES

- Quick exhaust
- Speed adjustment during operation Simple dispensing
- Rapid reset/reload
- Customization possible

BENEFITS

- Prevents anti-drip
- One hand pressure adjustment
- Customer labelling

APPLICATIONS




PRODUCT BY RANGE



THE TS444 KX 2-COMPONENT PNEUMATIC DISPENSERS COMPACT REINFORCED NYLON HANDLE ALLOWS FOR SIMPLE EFFECTIVE OPERATION, WHILE THE QUICK EXHAUST VALVE PREVENTS MATERIAL ANTI-DRIP FOR EFFORTLESS DISPENSING.

SPECIFICATIONS


- Lightweight: 3.05 kg / 6.80 lbs
- Cartridge Holder Length: 278 mm / 11.0 in
- Maximum Thrust: 4 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Barrel Material: Aluminum
- Cartridge Holder Material: Steel
- Cartridge Capacity: 365 mL (12.8 oz), 385 mL (13.5 oz), 585 mL (20.6 oz)
- Cartridge Ratio: 3:1
- Viscosity: Medium
- Standard Color: Black/Red
- Customized versions on demand

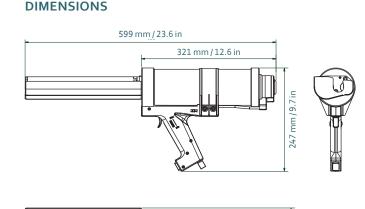



Part number		Packaging
DP2K 585-03-400-101	152487	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



CONVERSION KITS

TS447 X-625 **580 ML CARTRIDGE DISPENSER**



Model shown: TS447 X-625 580 mL

FEATURES

- Quick exhaust
- Speed adjustment during operation Simple dispensing
- Rapid reset/reload
- Customization possible

BENEFITS

- Prevents anti-drip
- One hand pressure adjustment
- Customer labelling

APPLICATIONS



PRODUCT BY RANGE





THE TS447 X-625 2-COMPONENT PNEUMATIC DISPENSER IS DESIGNED FOR USE WITH HIGH VISCOSITY SEALANTS AND ADHESIVES. A ONE-HANDED PRESSURE ADJUSTMENT ALLOWS FOR RAPID RESET AND RELOAD.

SPECIFICATIONS

- Lightweight: 3.53 kg / 7.87 lbs
- Cartridge Holder Length: 269 mm / 10.6 in
- Maximum Thrust: 6.25 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Aluminum
- Frame Material: Steel
- Cartridge Capacity: 580 mL (20.4 oz)
- Cartridge Ratio: 1:1
- Viscosity: High
- Standard Color: Black/Red
- Customized versions on demand

DIMENSIONS

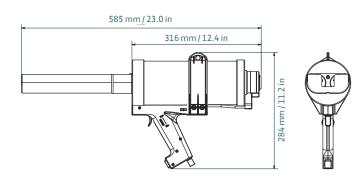



Part number		Packaging
DP2K 585-03-400-101	152387	1 per Box


MATCHING MIXPAC[™] CARTRIDGES

COMPATIBLE SIDE-BY-SIDE CARTRIDGES



1	238.0	9.37
а	Ø 47.0	Ø1.8
с	98.0	3.8

TS488 X 600 ML CARTRIDGE DISPENSER

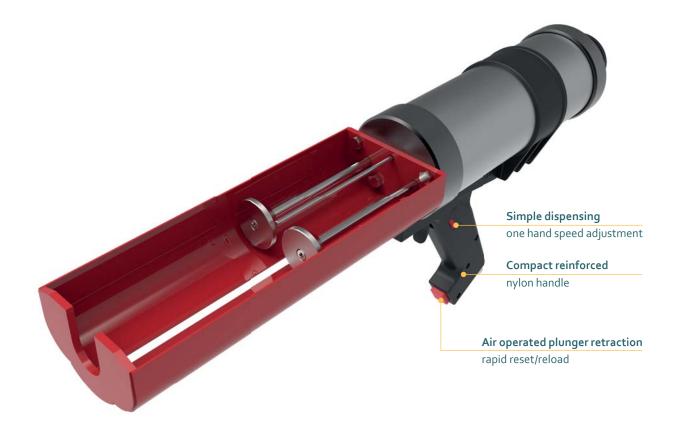

Model shown: TS488 X 600 mL

FEATURES

- Air operated plunger retraction
- One hand pressure adjustment
- Anti-drip function
- Long life technology
- Customization possible

BENEFITS

- Quick cartridge exchange
- Simple dispensing speed adjustment
- Clean application
- Precise working
- Customer labelling







THE TS488 X 2-COMPONENT PNEUMATIC DISPENSERS ONE-HANDED PRESSURE ADJUSTMENT ALLOWS FOR SIMPLE EFFECTIVE OPERATION. IN ADDITION, THE AIR OPERATED PLUNGER RETRACTION OFFERS RAPID RESET AND RELOAD.

SPECIFICATIONS

- Lightweight: 2.5 kg / 5.5 lbs
- Cartridge Holder Length: 286 mm / 11.2 in
- Maximum Thrust: 4 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Barrel Material: Aluminum
- Cartridge Holder Material: Steel
- Cartridge Capacity: 600 mL (21.1 oz)
- Cartridge Ratio: 1:1
- Viscosity: Medium
- Standard Color: Black/Red
- Customized versions on demand

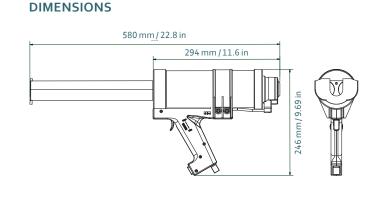




Part number		Packaging
DP2K 600-01-400-400	152899	1 per Box

MATCHING MIXPAC[™] CARTRIDGES

COMPATIBLE SIDE-BY-SIDE CARTRIDGES




Aluminum Cartridge 620 mL (2×310 mL) / 1:1 AL

1	217.0	8.54
а	Ø48.0	Ø1.89
с	95.5	3.76



TS488 XM 600 ML CARTRIDGE DISPENSER

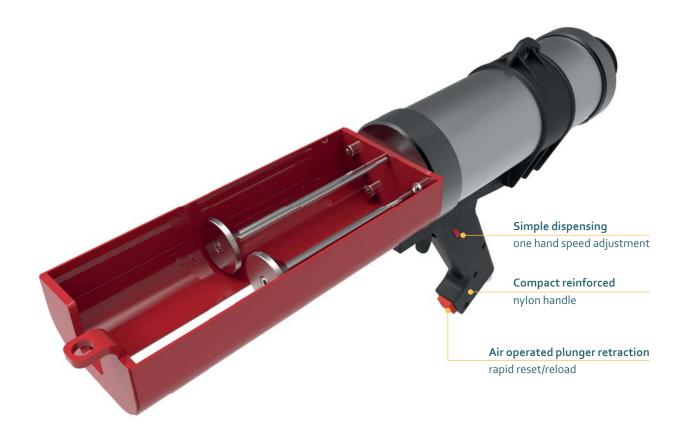

Model shown: TS488 XM 600 mL

FEATURES

- Air operated plunger retraction
- One hand pressure adjustment
- Anti-drip function
- Long life technology
- Customization possible

BENEFITS

- Quick cartridge exchange
- Simple dispensing speed adjustment
- Clean application
- Precise working
- Customer labelling









THE TS488 XM 2-COMPONENT PNEUMATIC DISPENSER IS DESIGNED FOR USE WITH MEDIUM VISCOSITY SEALANTS AND ADHESIVES WHILE THE ANTI-DRIP FUNCTION MAKES FOR EASY AND CLEAN DISPENSING.

SPECIFICATIONS

- Lightweight: 2.5 kg / 5.5 lbs
- Cartridge Holder Length: 270 mm / 10.6 in
- Maximum Thrust: 4 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Aluminum
- Frame Material: Steel
- Cartridge Capacity: 600 mL (21.1 oz)
- Cartridge Ratio: 1:1
- Viscosity: Medium
- Standard Color: Black/Red
- Customized versions on demand

DIMENSIONS





Part number		Packaging
DP2K 600-01-400-101	152352	1 per Box

MATCHING MIXPAC[™] SIDE-BY-SIDE CARTRIDGES



600 mL / 1:1 PP



COMPATIBLE CARTRIDGES



600 mL / 1:1 PP

I.	215.0	8.46
а	Ø 49.3	Ø1.94
С	98.5	3.88

TS493 X / TS493 XT 600 ML CARTRIDGE DISPENSER



Model shown: TS493 X(T) 600 mL

FEATURES

- Air operated plunger retraction
- One hand pressure adjustment
- Anti-drip function
- Long life technology
- Customization possible

BENEFITS

- Quick cartridge exchange
- Simple dispensing speed adjustment
- Clean application
- Precise working
- Customer labelling







THE TS493 X(T) 2-COMPONENT PNEUMATIC DISPENSER ANTI-DRIP FUNCTION MAKES FOR EASY AND CLEAN DISPENSING. IN ADDITION, THE AIR OPERATED PLUNGER RETRACTION OFFERS RAPID RESET AND RELOAD.


SPECIFICATIONS

- Lightweight: 2.6 kg / 5.6 lbs
- Cartridge Holder Length: 235 mm / 9.3 in
- Maximum Thrust: 4 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Aluminum
- Frame Material: Steel
- Cartridge Capacity: 600 mL (21.1 oz)
- Cartridge Ratio: 1:1
- Viscosity: Medium
- Standard Color: Black/Red
- Customized versions on demand



DIMENSIONS





Part number		
DP2K 600-01-400-201	151790 TS493 X (620 mL)	1 per Box
DP2K 600-01-400-401	152883 TS493 XT (600 mL)	1 per Box

MATCHING MIXPAC[™] CARTRIDGES

COMPATIBLE SIDE-BY-SIDE CARTRIDGES

			o a		
Plastic Cartridge		Plastic Cartridge			
620 mL (2×310 mL)/1:1 PP		600 mL / 1:1 PP			
1:1		inch	1:1		inch
1	217.0	8.54	1	215.0	8.46
a	Ø48.0	Ø1.89	а	Ø 49.0	Ø1.93
с	95.5	3.76	с	99.0	3.9

CONVERSION KITS

TS471 1400 ML CARTRIDGE DISPENSER



Model shown: TS471 1400 mL

FEATURES

- Quick exhaust
- Simple dispensing
- Air operated plunger retraction
- Customization possible

BENEFITS

- Prevents anti-drip
- One-hand speed adjustment
- Quick cartridge exchange
- Customer labelling

APPLICATIONS



PRODUCT BY RANGE





THE TS471 2-COMPONENT PNEUMATIC DISPENSERS AIR OPERATED PLUNGER RETRACTION OFFERS RAPID RESET AND RELOAD WHILE ANTI-DRIP FUNCTION MAKES FOR EASY AND CLEAN DISPENSING.

SPECIFICATIONS

- Lightweight: 3.95 kg / 8.8 lbs
- Cartridge Holder Length: 298 mm / 11.7 in
- Maximum Thrust: 8.3 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Cartridge Holder Material: Aluminum
- Frame Material: Steel
- Cartridge Capacity: 1400 mL (49.3 oz)
- Cartridge Ratio: 3:1
- Viscosity: Medium/High
- Standard Color: Black/Red
- Customized versions on demand

DIMENSIONS





Part number		Packaging
DP2K 1400-03-830-001	153201	1 per Box

MATCHING MIXPAC[™] CARTRIDGES

COMPATIBLE SIDE-BY-SIDE CARTRIDGES



1	235.0	9.25
а	Ø 96.4	Ø 3.8
b	Ø 60.0	Ø 2.36
С	157.5	6.2

MK[™] DISPENSER ACCESSORIES MAKE THE MOST OF YOUR DISPENSER WITH THE FOLLOWING RANGE OF MK ACCESSORIES.

	Name/Description	Part Number	Compatible with	
Pistons				
	Piston for Cartridge	152549	TS493 X(T)	
Battery				
	Bosch Professional Charger Universal battery charger for 18 V batteries.	163517 (EU) 165577 (UK) 165572 (US)	MK 2K B900 series	
	Bosch Professional Battery Lithium-ion battery, 18 V 2.0 Ah.	175925 163515 (US)	MK 2K B900 series	
General accessories				
	Shoulder strap	129031		

MK[™] DISPENSER

WARRANTY STATEMENT

medmix offers a (2) year manufacturing warranty effective at the date of invoice. medmix will repair or replace any product which examination proves to be a manufacture defect.

LIMITATIONS:

This warranty does not cover:

1. Repairs made or attempted by other than medmix UK Ltd. or Authorized Service Centre 2. Normal wear and tear

- 3. Misuse
- 4. Improper maintenance
- 5. Continued use after partial failure

6. Tools that have been modified or used with improper accessories

Should a problem develop while still under warranty, return the complete product to medmix UK Ltd. freight prepaid and insured. If inspection shows the problem has been caused by a defect in manufacture, all repairs, or a replacement will be made, at no charge and the product will be returned, transportation prepaid. No other warranty, written or verbal, is authorized.

The repair and replacement remedies described herein are exclusive. In no event shall medmix UK Ltd. be liable for any incidental, special, or consequential damages, including loss of profits, loss of use or loss of production.

This warranty is in lieu of all other warranties, expressed or implied including without limitation the implied warranties of merchantability and fitness for a particular purpose, which are expressly disclaimed.

DELIVERING INNOVATION. INSPIRING CONFIDENCE.

EUROPE

medmix Switzerland AG Ruetistrasse 7 9469 Haag, Switzerland Phone +41 81 414 70 00 sales.industry@medmix.com www.medmix.swiss

USA, SOUTH AMERICA, CANADA AND MEXICO

medmix USA Inc. 8 Willow St. Salem, NH 03079, USA Phone +1 603 893 2727 sales.industry@medmix.com www.medmix.swiss

UK AND IRELAND

medmix UK Ltd.

1 Tealgate, Charnham Park, Hungerford Berkshire, RG17 0YT, United Kingdom Phone: +44 (0)1488 647 800 sales.industry@medmix.com www.coxdispensers.com

ASIA PACIFIC

medmix China Ltd. 68 Bei Dou Lu, Minhang Shanghai 200245, China Phone: +86 21 6430 68 68 sales.industry@medmix.com www.medmix.swiss



Legal Notice: This brochure is a general presentation. The information contained in this publication is believed to be accurate and reliable but is not to be construed as implying any warranty or guarantee of performance. We waive any liability and indemnity for effects resulting from its application. Please, contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.

© 2022 medmix Switzerland AG All rights reserved.

medmix is a trademark belonging to medmix AG, and MK is a trademark belonging to medmix Switzerland AG.